


PetroQuip Filter and Filter Sub

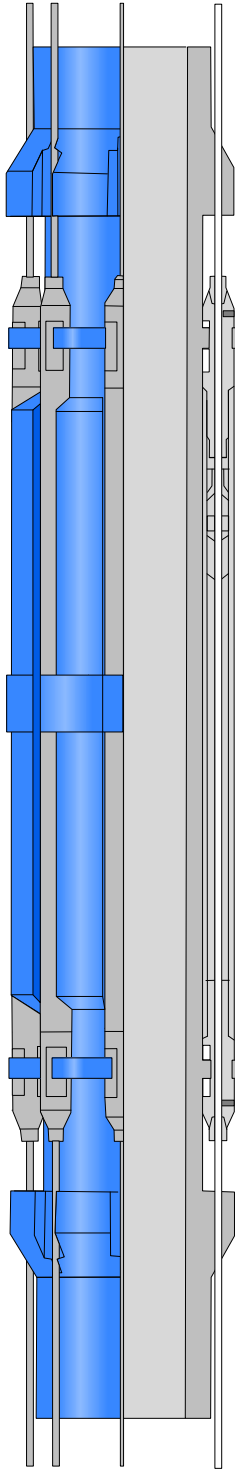

The **PetroQuip Control Line Filter** filters hydraulic fluid in control lines before entering downhole tools to at least 10 microns, safeguarding equipment with NAS6 fluid. Each filter has a built-in contingency feature to bypass the screen and sump area if the filter is plugged, ensuring fluid will always pass through and operate tools below.

The control line filter is carried downhole on a **PetroQuip Filter Sub** that is optimally designed to carry up to eight control line filters on one sub which also adds the benefit of replacing splices and splice subs in sub-assembly smart completions with a filtration purpose.

Features and Benefits

- Provides cost effective Insurance for your premium downhole equipment
- Available with either 5 or 10 micron filtration
- Designed with contingency rupture disk by-pass
- 15,000 psi rating
- OAL of 16 inches
- Metal to Metal Seals

Available in 3-1/2", 4-1/2", 5-1/2" and 7" sizes