
PetroQuip Open Hole Packer



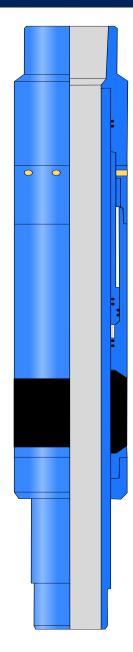

The **PetroQuip Open Hole Packer** is a single element open hole packer that provides high-performance zone isolation, during stimulation, and provides water and gas isolation. The hydraulically set packer combines the sealing strength of a mechanical element with the setting force of a dual-piston cylinder and mechanical body-lock system.

Features & Benefits:

- High PSI pressure rating
- Open hole zonal isolation
- Anti-preset feature
- Large element contact area to help ensure isolation
- Adjustable setting force

Open Hole Size (in)	Thread	Tool OD (in)	Tool OAL (in)	Burst Pressure Rating (psi)	Collapse Pressure Rating (psi)	Temp Rating (°F)	Setting Pressure (psi)	Tensile (lbs)
6.125	2-7/8" 6.4# Hydril CS/ PTS-8	5.875	43.45	10,400	10,000	350	522 - 4179	220,500