


PetroQuip Profile Nipples

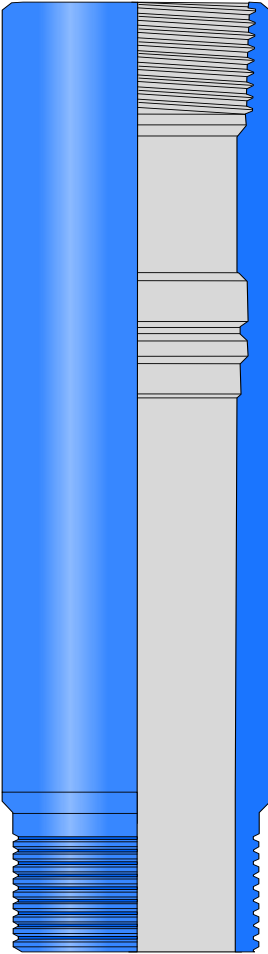

The **PetroQuip Landing 14L Certified Profile Nipples** are manufactured to accept the industry standard locking tools of major manufacturers. They exceed the performance of the tubing string. Any desired number of Landing Nipples can be fixed in the production string so that it offers an infinite number of positions for locking and setting surface controls. **PetroQuip Landing Profile Nipples** are available in PQX, PQR, PQRN, and PQXN profiles

Tubing Size (in)	Weight (lb/ft)	Nipple Type	Profile Size	OD	Minimum ID (in)	Material Yield (psi)	Pressure Rating (psi)	
2-1/16	3.25	PQXN	1.630	2.906	1.536	80,000 85,000 95,000 110,000	10,000	
2-3/8	5.95	PQR	1.710	2.906	1.710		15,000	
		PQRN		2.906	1.560		15,000	
	4.70	PQX	1.875	2.710	1.875		10,000	
		PQXN	1.875		1.791		10,000	
2 7/8	7.90	PQR	2.188	3.438	2.188		15,000	
	8.70	PQR	2.125	3.438	2.125		10,000	
	6.50	PQX	2.313	3.260	2.313			
3 1/2	12.95	PQR	2.562	4.313	2.562		15,000	
	12.95	PQRN	2.562	4.313	2.329			
	15.80	PQRN	2.313	4.313	2.131			
	9.30	PQX	2.813	3.915	2.813			10,000
	12.70	PQBF	2.750	4.500	2.75			13,000
4 1/2	12.75	PQR	3.813	5.570	3.813		15,000	
		PQX		5.563			10,000	