


PetroQuip Pump-Out Wireline Entry Guide

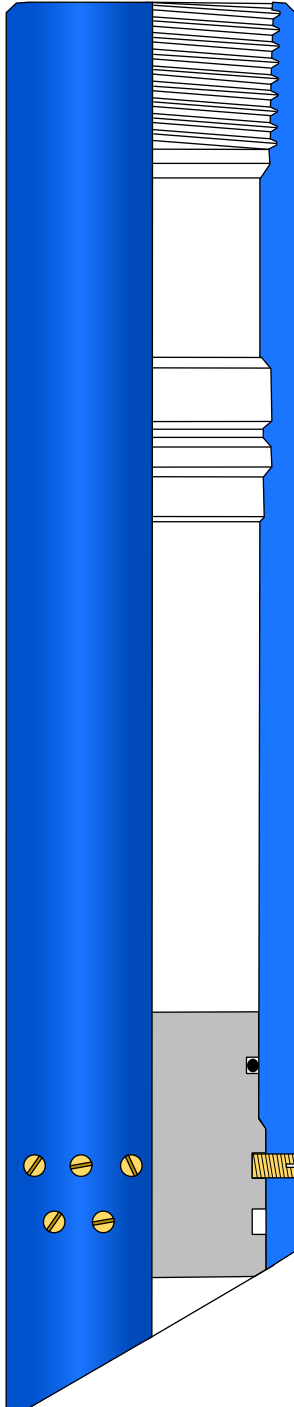

The **PetroQuip Pump-Out Wireline Entry Guide (WLEG)** provides a means of isolating the wellbore during completion installations. The Pump-Out portion of the WLEG can be manufactured from a glass disk or dissolvable material depending on the application. Unlike other Pump-out subs, the **PetroQuip Pump-Out WLEG** has a profile machined above the Pump-Out section to allow future isolation operations.

Features and Benefits

- Can be ordered with multiple combinations of thread, profile, or pump-out material.
- Disk can be custom made to meet any wellbore requirements
- No restriction left in the well after activation
- Doesn't need a spear or drop bar to activate
- Activation pressure is fully customizable
- Dual seals ensure pressure integrity

Tubing Size (in)	Tubing Weight (lbs)	ID (in)	OD (in)	Burst and Collapse Pressure Rating (psi)	Temp Rating (°F)
3-1/2	9.2	2.813	3.915	10,000	300
	12.7	2.562			
4-1/2	12.6	3.813	5.563		
	12.75				